

# RENO

PALI - POLES



Legno - Wood


Copertura in legno di pino nordico trattato in autoclave tanalith-E  
 Chiave apertura/chiusura portello morsettiera a richiesta (Cod. 1440.000N)  
 Asola e morsettiera 4x16mm<sup>2</sup> CLII con portafusibile e portello di chiusura  
 Verniciatura a polvere con pretattamento speciale per esterni  
 Viteria in acciaio inox A2  
**Palo interrato - System A**  
 Palo cilindrico Ø120/60x4200mm in acciaio zincato a caldo 75µm UNI EN 1461 ricoperto in legno

Ø60mm



Nordic pine wood covering with ecological additive Tanalit-E  
 On request inspection door opening/closing key (Cod. 1440.000N)  
 Hole and terminal block 4x16mm<sup>2</sup> CLII with fuse holder and inspection door  
 Polyester powder coating after a treatment specific for weathering resistance  
 A2 stainless steel screws  
**Buried pole - System A**  
 Cylindrical pole Ø120/60x4200mm covered wood for ground fixing made of hot-dip galvanised steel 75µm UNI EN 1461

**Palo a norme DIN**  
 Pole conforming to DIN norms

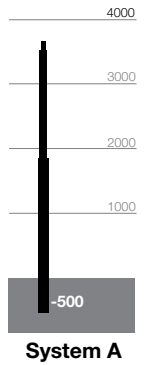

**SYSTEM A BURIED POLE**

Altezza totale Total height	Altezza fuori terra Total ground height	Colore Colour	Codice Code	
4200mm	3700mm		1419.100S	1



**Plinto consigliato**  
 Suggested plinth  
 1000x1000x1200mm

# VOLGA

PALI - POLES



Legno - Wood


Copertura in legno di pino nordico trattato in autoclave tanalith-E  
 Chiave apertura/chiusura portello morsettiera a richiesta (Cod. 1440.000N)  
 Asola e morsettiera 4x16mm<sup>2</sup> CLII con portafusibile e portello di chiusura  
 Verniciatura a polvere con pretattamento speciale per esterni  
 Viteria in acciaio inox A2  
**Palo interrato - System A**  
 Palo pastorale Ø120/60x5200mm in acciaio zincato a caldo 75µm UNI EN 1461 ricoperto in legno

Ø60mm



Nordic pine wood covering with ecological additive Tanalit-E  
 On request inspection door opening/closing key (Cod. 1440.000N)  
 Hole and terminal block 4x16mm<sup>2</sup> CLII with fuse holder and inspection door  
 Polyester powder coating after a treatment specific for weathering resistance  
 A2 stainless steel screws  
**Buried pole - System A**  
 Pastoral pole Ø120/60x5200mm covered wood for ground fixing made of hot-dip galvanised steel 75µm UNI EN 1461

**Palo a norme DIN**  
 Pole conforming to DIN norms

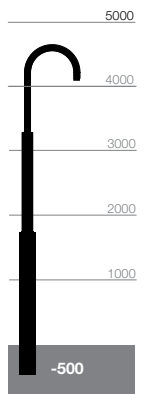

**SYSTEM A BURIED POLE**

Altezza totale Total height	Altezza fuori terra Total ground height	Colore Colour	Codice Code	
5200mm	4700mm		1420.100S	1



**Plinto consigliato**  
 Suggested plinth  
 1000x1000x1200mm