

# SLOT

ARCHITETTURALI - ARCHITECTURAL LIGHT FITTINGS

## LED

3W - 4000K - **217 lm** - 700mA  
 3W - 3000K - **191 lm** - 700mA  
 2x0.75mm<sup>2</sup> H05RN-F (1.5m)

■ Nero - Black



Proiettore cilindrico per fissaggio diretto a parete/soffitto o terreno tramite picchetto  
 Driver remoto non incluso  
 Diffusore in vetro piano temperato spessore 5mm  
 Basamento e snodo di regolazione in tecnopolimero rinforzato  
 Corpo in alluminio anodizzato e verniciato  
 Viteria in acciaio inox A2

**Accessorio picchetto**  
 Picchetto in tecnopolimero rinforzato

Floodlight for wall/ceiling fixing or direct ground fixing  
 Electronic driver (remote, to be ordered separately)  
 Flat tempered glass diffuser 5mm thickness  
 Reinforced thermoplastic swivel joint and base  
 Anodised and painted aluminium body  
 A2 stainless steel screws

**Spike (accessory)**  
 Reinforced thermoplastic body



CE IP67 - IK08




### PARETE - PAVIMENTO WALL - CEILING VERSION

Dimensioni Dimensions	Potenza Power	Colore Colour	Codice Code	
Ø35x105mm	3W 4000K 10° 217 lm	■	4038.182N	1
Ø35x105mm	3W 4000K 30° 217 lm	■	4038.282N	1
Ø35x105mm	3W 4000K 40° 217 lm	■	4038.382N	1
Ø35x105mm	3W 3000K 10° 191 lm	■	4038.184N	1
Ø35x105mm	3W 3000K 30° 191 lm	■	4038.284N	1
Ø35x105mm	3W 3000K 40° 191 lm	■	4038.384N	1

### ACCESSORI - ACCESSORIES

Alimentatore elettronico 700mA 8W IP20 Electronic driver 700mA 8W IP20	CS160014	1
Alimentatore elettronico 700mA 33W IP20 Electronic driver 700mA 33W IP20	CS160020	1

Alimentatore elettronico Electronic driver 700mA 8W CS160014	Alimentatore elettronico Electronic driver 700mA 33W CS160020
min 1 - max 2	min 4 - max 12

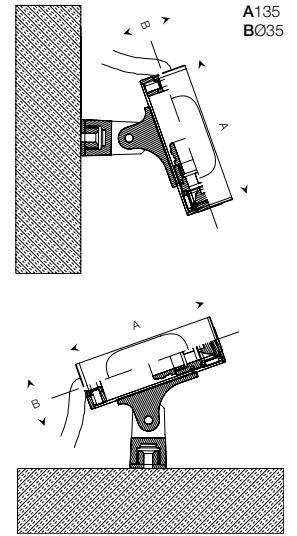

CE IP67 - IK08



### PICCHETTO SPIKE VERSION

Dimensioni Dimensions	Potenza Power	Colore Colour	Codice Code	
Ø35x105mm	3W 4000K 10° 217 lm	■	4039.182N	1
Ø35x105mm	3W 4000K 30° 217 lm	■	4039.282N	1
Ø35x105mm	3W 4000K 40° 217 lm	■	4039.382N	1
Ø35x105mm	3W 3000K 10° 191 lm	■	4039.184N	1
Ø35x105mm	3W 3000K 30° 191 lm	■	4039.284N	1
Ø35x105mm	3W 3000K 40° 191 lm	■	4039.384N	1

### ACCESSORI - ACCESSORIES

Alimentatore elettronico 700mA 8W IP20 Electronic driver 700mA 8W IP20	CS160014	1
Alimentatore elettronico 700mA 33W IP20 Electronic driver 700mA 33W IP20	CS160020	1

Alimentatore elettronico Electronic driver 700mA 8W CS160014	Alimentatore elettronico Electronic driver 700mA 33W CS160020
min 1 - max 2	min 4 - max 12

