

CAREZZA SYSTEM - upright installation



Buried pole - System A

- Cylindrical pole Ø60x3000mm for ground fixing made of hot-dip galvanised steel 75µm UNI EN 1461

Flanged pole - System B

- Cylindrical pole Ø60x3000mm for plinth/floor fixing complete with flange made of hot-dip galvanised steel 75µm UNI EN 1461
 - 200x200mm flange, 8mm thick made of hot-dip galvanised steel 75µm UNI EN 1461

Technical details

- Cylindrical pole Ø60mm for upright installation
 - Brackets and connectors 1/2/3 lights
 - Wall version
 - To be used with sfera Ø300mm
 - Hot dipped galvanized Ø28mm steel tubular bracket 75µm UNI EN 1461
 - Reinforced thermoplastic connection Ø60mm
 - Polyester powder coating after a treatment specific for weathering resistance
 - A2 stainless steel screws

Wall fixing


- Hot dipped galvanized Ø28mm steel tubular bracket 75µm UNI EN 1461 (250mm)
 - Reinforced thermoplastic connection Ø60mm

Compulsory accessory (to be ordered separately)

- Counter flange 200x200x3mm and anchor bolts kit M14x330mm (only system B)

Colour


- Black textured

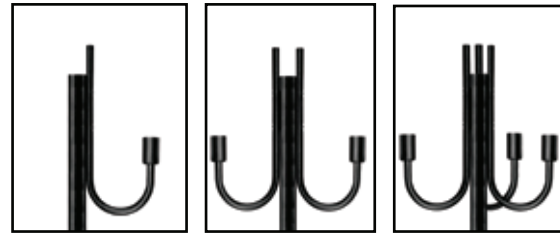


1 Light

2 Lights

3 Lights - 120°

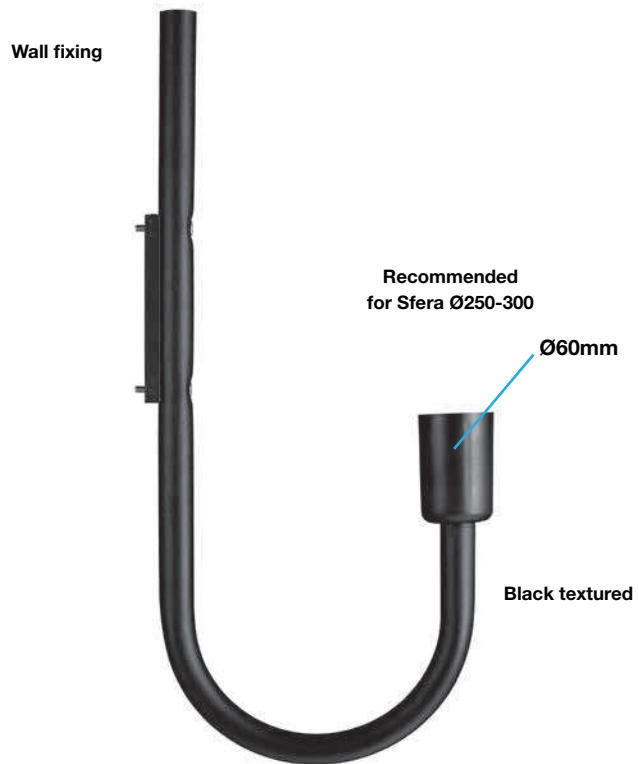

Wall fixing	Lights	Black textured
610x250mm	1	1000.200N



Buried pole - System A


Total height	Total ground height	Lights	Black textured
3000mm	2500mm	1	1119.100N
3000mm	2500mm	2	1119.200N
3000mm	2500mm	3	1119.300N

Flanged pole - System B

Total height	Total ground height	Lights	Black textured
3000mm	3000mm	1	1123.100N
3000mm	3000mm	2	1123.200N
3000mm	3000mm	3	1123.300N


Compulsory accessory system B

Counter flange and anchor bolts kit **Code** 4000.0001



Suggested plinth
600x600x700mm

Pole conforming to DIN norms

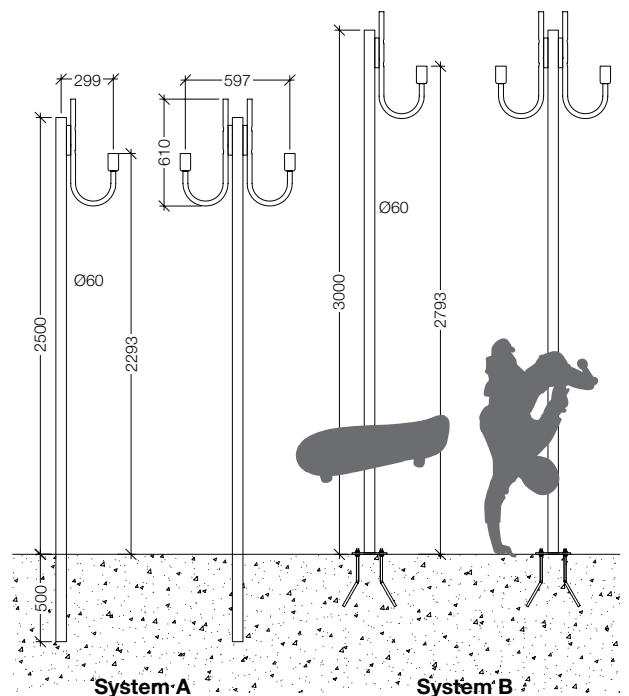

CAREZZA SYSTEM - downlight installation



Buried pole - System A

- Cylindrical pole Ø60x3000mm for ground fixing made of hot-dip galvanised steel 75µm UNI EN 1461

Flanged pole - System B

- Cylindrical pole Ø60x3000mm for plinth/floor fixing complete with flange made of hot-dip galvanised steel 75µm UNI EN 1461
 - 200x200mm flange, 8mm thick made of hot-dip galvanised steel 75µm UNI EN 1461

Technical details

- Cylindrical pole Ø60mm for downlight installation
 - Brackets and connectors 1/2/3 lights
 - Wall version
 - To be used with sfera Ø300mm
 - Hot dipped galvanized Ø28mm steel tubular bracket 75µm UNI EN 1461
 - Reinforced thermoplastic connection Ø60mm
 - Polyester powder coating after a treatment specific for weathering resistance
 - A2 stainless steel screws

Wall fixing


- Hot dipped galvanized Ø28mm steel tubular bracket 75µm UNI EN 1461 (370mm)
 - Reinforced thermoplastic connection Ø60mm

Compulsory accessory (to be ordered separately)

- Counter flange 200x200x3mm and anchor bolts kit M14x330mm (only system B)

Colour

- Black textured

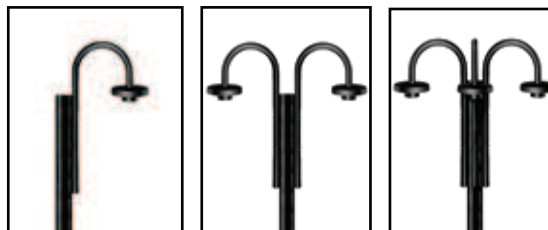


1 Light

2 Lights

3 Lights - 120°



Wall fixing	Lights	Black textured
610x370mm	1	1000.300N



Buried pole - System A


Total height	Total ground height	Lights	Black textured
3000mm	2500mm	1	1119.1R0N
3000mm	2500mm	2	1119.2R0N
3000mm	2500mm	3	1119.3R0N

Flanged pole - System B

Total height	Total ground height	Lights	Black textured
3000mm	3000mm	1	1123.1R0N
3000mm	3000mm	2	1123.2R0N
3000mm	3000mm	3	1123.3R0N


Compulsory accessory system B

Counter flange and anchor bolts kit **Code** 4000.0001



Suggested plinth
600x600x700mm

Pole conforming to DIN norms

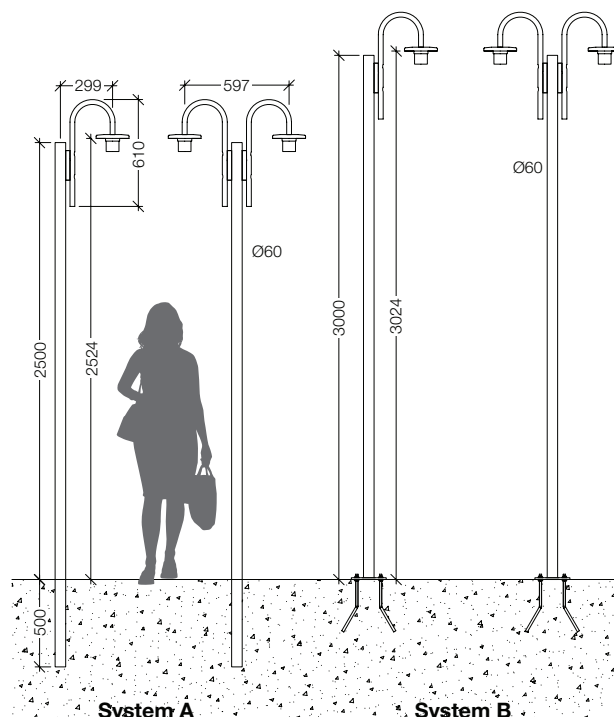

POLES AND SYSTEMS