

# Delux Indi

## Technical details

- Led's luminaire 752mm high, complete with base for plinth/floor installation
- Preset for installation on a Ø60mm pole
- Polyester powder coating after specific weathering resistance treatment
- A2 stainless steel screws
- Silicone gaskets
- Anodized aluminium heat sink
- M12 metallic cable gland
- Driver IP54 included
- LED's circuit powered at 700mA and PCB in IMS

## Top cover

- Anodised and painted die-cast aluminium top cover

## Lens

- 18° beam optics
- Non yellowing, transparent PMMA (acrylic) lens

## Reflector


- Painted reflector in reinforced thermoplastic

## Housing

- Anodised and painted extruded aluminium housing


## Base

- Reinforced thermoplastic base for plinth/floor installation, or for installation on a Ø60mm pole

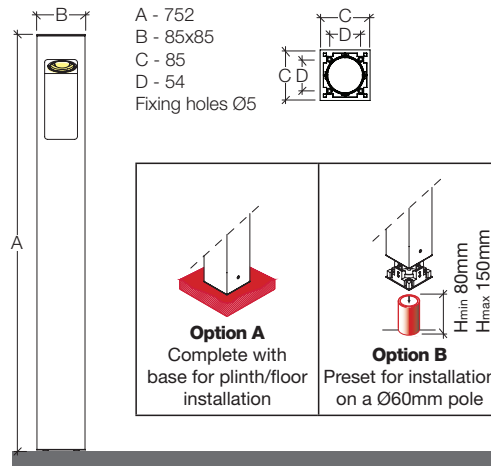


**L** = Width (m)  
**I** = Pole spacing (m)  
**Emed** = Average illuminance (Lux)  
**Emin** = Minimum illuminance (Lux)

	L m	I m	Emed Lux	Emin Lux
<b>8,4W</b>	2,5	3	61	5

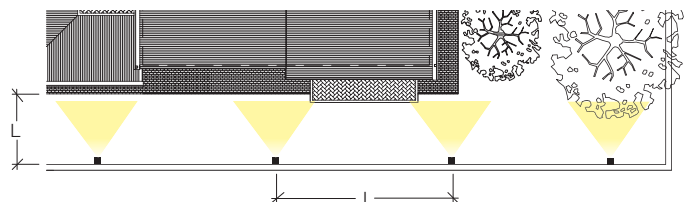

K/Power	Rust	Metallic grey RAL 9006	Anthracite RAL 7016 textured	
● 4000K - 8,4W	1024.182J	1024.182M	1024.182S	1
● 3000K - 8,4W	1024.184J	1024.184M	1024.184S	1



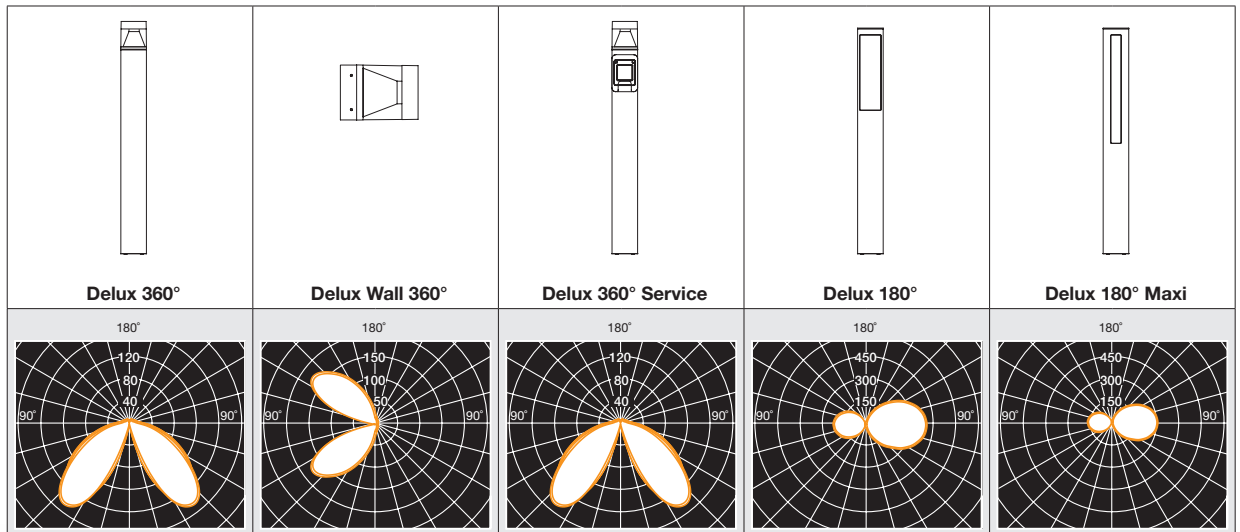

Wall installation		--		--	--	--	--	--	--	--	
Ground installation			--								
Complying ECC standards											
Insulation class											
Voltage		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz	
Step MacAdam		3		3		3		3		3	
Life time		L70/B50>54Kh-Tc 105°C		L70/B50>54Kh-Tc 105°C		L70/B50>60Kh-Tc 105°C		L70/B50>60Kh-Tc 105°C		L70/B50>60Kh-Tc 105°C	
Colour temperature											
Luminaire output		10W 663 lm	10W 663 lm	10W 663 lm	10W 663 lm	10W 663 lm	10W 663 lm	10W 869 lm	10W 869 lm	10W 710 lm	10W 710 lm
IP (Protection degree)		IP65		IP65		IP55		IP65		IP65	
IK (Impact resistance)		IK04		IK04		IK04		IK06		IK06	
Year warranty											
Photobiological risk											
Pre-wired with:		15cm cable H05RN-F 3x0,75mm <sup>2</sup>		90cm cable H05RN-F 3x0,75mm <sup>2</sup>		15cm cable H05RN-F 3x0,75mm <sup>2</sup>		25cm cable H05RN-F 2x0,75mm <sup>2</sup>		25cm cable H05RN-F 2x0,75mm <sup>2</sup>	
CRI		≥80		≥80		≥80		≥80		≥80	
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included											
		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire	



							
Delux 90°		Delux Indi		Delux Service		Delux Round	
							
--		--		--		--	
✓		✓		✓		✓	
✓		✓		✓		✓	
				--			
220-240V 50/60Hz		220-240V 50/60Hz		--		220-240V 50/60Hz	
3		3		--		3	
L70/B50>60Kh - Tc 105°C		L90/B50>50Kh - Tc 105°C		--		L70/B50>54Kh - Tc 105°C	
 3000K	 4000K	 3000K	 4000K	--		 3000K	 4000K
15W 969 lm	15W 969 lm	8,4W 572 lm	8,4W 589 lm	--		10W 663 lm	10W 663 lm
IP65		IP65		IP55		IP65	
IK03		IK06		--		IK04	
✓		✓		✓		✓	
✓		✓		--		✓	
25cm cable H05RN-F 3x0,75mm <sup>2</sup>		25cm cable H05RN-F 2x0,75mm <sup>2</sup>		--		15cm cable H05RN-F 3x0,75mm <sup>2</sup>	
≥80		≥80		--		≥80	
							
The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire	

# Technical details

OUTDOOR RESIDENTIAL  
LUMINAIRE