



Lux Est 85 - All-light + Lux Est 85 - Semi-covered

Technical details

- Luminaire available in E27 versions in three heights, 425mm, 680mm and 1000mm, complete with base for plynth/floor installation
- Silicone gaskets
- Polyester powder coating after a treatment specific for weathering resistance
- Terminal block 2x2,5mm² IP68 for cables Ø5mm-Ø14mm positioned in the base for an easy installation
- Conforms to regional laws against light pollution
- A2 stainless steel screws

Diffuser

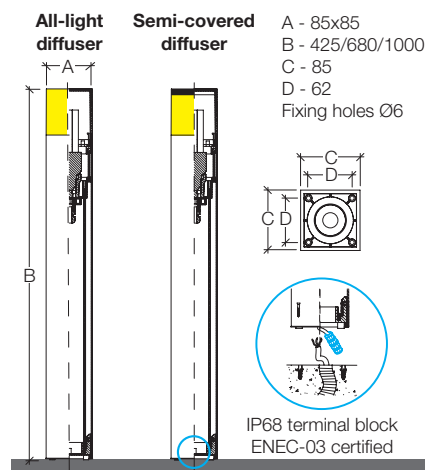
- Non yellowing translucent PMMA (acrylic) - all-light diffuser version
- Non yellowing translucent and painted PMMA (acrylic) - semi-covered diffuser version

Housing

- Extruded anodised aluminium housing in natural or painted finish (White/Anthracite/Rust)

Base

- Reinforced thermoplastic base






All-light





| Dimensions | Power | White RAL 9003 | Aluminium | Rust | Anthracite RAL 7016 textured | |
|--------------|---------------|-------------------|-----------|-----------|------------------------------------|---|
| 85x85x425mm | max 21W - E27 | 1058.001B | 1058.001G | 1058.001J | 1058.001S | 1 |
| 85x85x680mm | max 21W - E27 | 1058.101B | 1058.101G | 1058.101J | 1058.101S | 1 |
| 85x85x1000mm | max 21W - E27 | 1058.201B | 1058.201G | 1058.201J | 1058.201S | 1 |











Semi-covered







































| | | | | | | |
|--------------|---------------|----|-----------|-----------|-----------|---|
| 85x85x425mm | max 16W - E27 | -- | 1058.501G | 1058.501J | 1058.501S | 1 |
| 85x85x680mm | max 16W - E27 | -- | 1058.601G | 1058.601J | 1058.601S | 1 |
| 85x85x1000mm | max 16W - E27 | -- | 1058.701G | 1058.701J | 1058.701S | 1 |

- 
 Max lamp dimension allowed
 16W - (Ø61 L136mm) - semi-covered
 21W - (Ø61 L155mm) - all-light
 Lamp not included















| | | | |
|--|---|---|---|
|  |  |  |  |
| White RAL 9003 | Aluminium | Rust | Anthracite RAL 7016 textured |

| | | | | |
|---|---|--|---|---|
|  |  |  |  |  |
| Lux Est 85 All-light | Lux Est 85 Semi-covered | Lux Est 85 Wall/Ceiling | Lux Est 85 Wall | Lux Est 170 All-light |
|  |  |  |  |  |

| | | | | | | |
|--|---|--|--|---|---|--|
| Ground installation |  |  |  | -- | -- |  |
| Ceiling installation |  | -- | -- |  | -- | -- |
| Wall installation |  | -- | -- |  |  | -- |
| Complying ECC standards |  |  |  |  |  |  |
| Insulation class |  |  |  |  |  |  |
| Voltage |  | 220-240V 50/60Hz | 220-240V 50/60Hz | 220-240V 50/60Hz | 220-240V 50/60Hz | 220-240V 50/60Hz |
| Lamp holder |  | E27 - max 21W (Lamp not included) | E27 - max 16W (Lamp not included) | E27 - max 12W (Lamp not included) | E27 - max 12W (Lamp not included) | E27 - max 27W (Lamp not included) |
| IP (Protection degree) |  | IP65 | IP65 | IP40/43 | IP44 | IP65 |
| IK (Impact resistance) |  | IK06 | IK06 | IK06 | IK06 | IK06 |
| Year warranty |  |  |  |  |  |  |
| Outward cable with tinned connector included IP68 |  | 20cm cable H05RN-F 2x0,75mm ² | 20cm cable H05RN-F 2x0,75mm ² | -- | -- | 20cm cable H05RN-F 2x0,75mm ² |
| Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) |  |  The "T"-3 ways and linear IP68 connector can be placed inside the luminaire |  The "T"-3 ways and linear IP68 connector can be placed inside the luminaire |  The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire |  The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire |  The "T"-3 ways and linear IP68 connector can be placed inside the luminaire |

Technical details

|  <p>Lux Est 170 Semi-covered</p> |  <p>Lux Est 170 Wall/Ceiling</p> |  <p>Lux Est 170 Wall</p> |
|--|---|---|
|  |  |  |
| ✓ | -- | -- |
| -- | ✓ | -- |
| -- | ✓ | ✓ |
| ✓ | ✓ | ✓ |
|  |  |  |
| 220-240V 50/60Hz | 220-240V 50/60Hz | 220-240V 50/60Hz |
| E27 - max 25W (Lamp not included) | E27 - max 21W (Lamp not included) | E27 - max 27W (Lamp not included) |
| IP65 | IP40/43 | IP44 |
| IK06 | IK06 | IK06 |
| ✓ | ✓ | ✓ |
| 20cm cable H05RN-F 2x0,75mm ² | -- | -- |
|  <p>The "T"-3 ways and linear IP68 connector can be placed inside the luminaire</p> |  <p>The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire</p> |  <p>The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire</p> |