



Coled Round

Technical details

- Led's luminaire in two heights, 700mm, 1000mm, complete with base for plinth/floor installation
- Silicone gaskets
- Polyester powder coating after a treatment specific for weathering resistance
- N°76 LED's and PCB in FR4
- LED's circuit mains powered
- A2 stainless steel screws
- Plastic PG9 cable gland with anti-condensation osmotic valve

Top cover

- Anodised and painted die-cast aluminium top cover

Diffuser


- Non yellowing traslucent PMMA (acrylic) diffuser

Housing


- Anodised and painted extruded aluminium housing









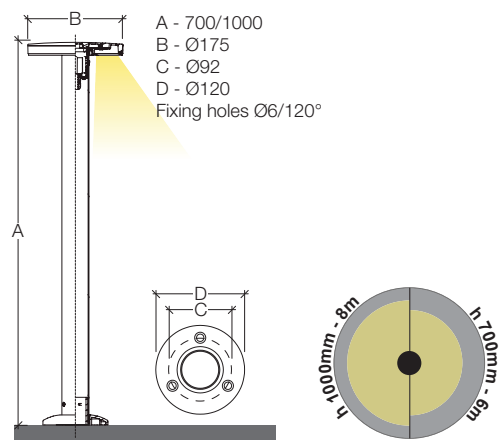










Base

- Painted reinforced thermoplastic base for plinth or floor installation



Dimensions	K/Power	Metallic grey RAL 9006	Anthracite RAL 7016 textured	
Ø175x700mm	● 4000K - 15W	1061.282G	1061.282S	1
	● 3000K - 15W	1061.284G	1061.284S	1
Ø175x1000mm	● 4000K - 15W	1061.382G	1061.382S	1
	● 3000K - 15W	1061.384G	1061.384S	1



						
		Coled Round	New Stelo	New Stelo Opaled	New Stelo Traled	Easy Lux
						
Ground installation						
Complying ECC standards						
Insulation class	Class					
Voltage	V	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Step MacAdam	Mac Adam	3	--	3	3	--
Life time	Life time	L70/B50>60Kh-Tc 105°C	--	L70/B50>60Kh-Tc 105°C	L70/B50>60Kh-Tc 105°C	--
Colour temperature	K	 3000K  4000K	--	 3000K  4000K	 3000K  4000K	--
Luminaire output	Ta 25°C	15W 1518 lm	--	5,1W 459 lm	5,1W 487 lm	5,1W 525 lm 5,1W 557 lm
Lamp holder		--	E27 - max 11W (Lamp not included)	--	--	E27 - max 10W (Lamp not included)
IP (Protection degree)		IP65	IP65	IP65	IP65	IP65
IK (Impact resistance)		IK05	IK02	IK02	IK06	IK02
Year warranty	3		--	--	--	--
Year warranty	5	--				
Photobiological risk	RG1		--			--
Pre-wired with:		10cm cable H05RN-F 3x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²
CRI		≥80	--	≥80	≥80	--
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included						
		The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire



Technical details

OUTDOOR RESIDENTIAL
LUMINAIRE