



New Stelo

Technical details

- Luminaire available in E27 versions in two heights, 590mm, 900mm complete with base for plinth/floor installation
- Silicone gaskets
- Polyester powder coating after a treatment specific for weathering resistance
- A2 stainless steel screws
- Plastic PG9 cable gland with anti-condensation osmotic valve

Diffuser


- Non yellowing traslucent PMMA (acrylic) diffuser

Housing

- Stainless steel AISI 304 housing (coated version in metallic grey RAL 9006 and black textured)
- Stainless steel AISI 316L housing (stainless steel version)

Base

- Stainless steel AISI 304 base (coated version in metallic grey RAL 9006 and black textured)
- Stainless steel AISI 316L base (stainless steel version)

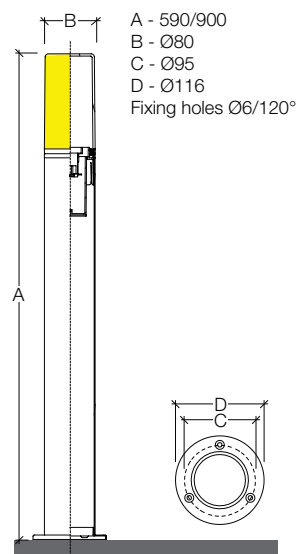


Dimensions	Power	Metallic grey RAL 9006	Black textured	AISI 316 L stainless steel	
Ø80x590mm	max 11W - E27	1051.101M	1051.101N	1051.101A	1
Ø80x900mm	max 11W - E27	1051.201M	1051.201N	1051.201A	1






























E27 tubular LED lamp
recommended



Max lamp dimension allowed
(Ø60 L115mm)
Lamp not included



		
Metallic grey RAL 9006	AISI 316L stainless steel	Black textured

						
		Coled Round	New Stelo	New Stelo Opaled	New Stelo Traled	Easy Lux
						
Ground installation						
Complying ECC standards						
Insulation class	Class					
Voltage	V	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Step MacAdam	Mac Adam	3	--	3	3	--
Life time	Life time	L70/B50>60Kh-Tc 105°C	--	L70/B50>60Kh-Tc 105°C	L70/B50>60Kh-Tc 105°C	--
Colour temperature	K	 3000K  4000K	--	 3000K  4000K	 3000K  4000K	--
Luminaire output	Ta 25°C	15W 1518 lm	15W 1518 lm	5,1W 459 lm	5,1W 487 lm	5,1W 525 lm
Lamp holder		--	E27 - max 11W (Lamp not included)	--	--	E27 - max 10W (Lamp not included)
IP (Protection degree)		IP65	IP65	IP65	IP65	IP65
IK (Impact resistance)		IK05	IK02	IK02	IK06	IK02
Year warranty	3		--	--	--	--
Year warranty	5	--				
Photobiological risk	RG1		--			--
Pre-wired with:		10cm cable H05RN-F 3x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²
CRI		≥80	--	≥80	≥80	--
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included						
		The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire



Technical details

OUTDOOR RESIDENTIAL
LUMINAIRE