

Easy Lux

Technical details

- Luminaire available in E27 versions in two heights, 590mm, 900mm complete with base for plinth/floor installation
- Bollard in coloured PC (polycarbonate), self-extinguishing, UV-stabilised and highly resistance to weathering
- **Particularly suitable for salty environments**
- Silicone gaskets
- A2 stainless steel screws
- Plastic PG9 cable gland with anti-condensation osmotic valve

Top cover

- PC (polycarbonate) top cover, in metallic gray RAL 9006, rust, black granule

Diffuser


- Non yellowing traslucent PMMA (acrylic) diffuser

Housing

- PC (polycarbonate) housing, in metallic gray RAL 9006, rust, black granule

Base

- PC (polycarbonate) base in black granule for plinth/floor installation

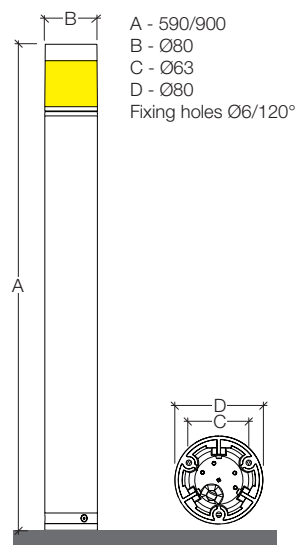

Dimensions	Power	Black	Rust	Metallic grey RAL 9006	
Ø80x590mm	max 10W - E27	1027.201N	1027.201J	1027.201M	1
Ø80x900mm	max 10W - E27	1027.301N	1027.301J	1027.301M	1






















Max lamp dimension allowed
(Ø60 L110mm)
Lamp not included

new



OUTDOOR RESIDENTIAL
LUMINAIRE



						
		Coled Round	New Stelo	New Stelo Opaled	New Stelo Traled	Easy Lux
						
Ground installation						
Complying ECC standards						
Insulation class	Class					
Voltage	V	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Step MacAdam	Mac Adam	3	--	3	3	--
Life time	Life time	L70/B50>60Kh-Tc 105°C	--	L70/B50>60Kh-Tc 105°C	L70/B50>60Kh-Tc 105°C	--
Colour temperature	K	 3000K  4000K	--	 3000K  4000K	 3000K  4000K	--
Luminaire output	Ta 25°C	15W 1518 lm	15W 1518 lm	5,1W 459 lm	5,1W 487 lm	5,1W 525 lm
Lamp holder		--	E27 - max 11W (Lamp not included)	--	--	E27 - max 10W (Lamp not included)
IP (Protection degree)		IP65	IP65	IP65	IP65	IP65
IK (Impact resistance)		IK05	IK02	IK02	IK06	IK02
Year warranty	3		--	--	--	--
Year warranty	5	--				
Photobiological risk	RG1		--			--
Pre-wired with:		10cm cable H05RN-F 3x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²	35cm cable H05RN-F 2x0,75mm ²
CRI		≥80	--	≥80	≥80	--
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included						
		The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire	The "T"-3 ways IP68 connector cannot be placed inside the luminaire



Technical details

OUTDOOR RESIDENTIAL
LUMINAIRE