

Easy Lux TP

Technical details

- Luminaire available in E27 versions for pole top use on Ø60mm poles with max thickness 3mm
- Silicone gaskets
- A2 stainless steel screws
- Plastic PG9 cable gland with anti-condensation osmotic valve
- Stainless steel AISI 301 fixing clips for pole fixing

Top cover


- PC (polycarbonate) top cover in black granule

Diffuser



- Non yellowing translucent PMMA (acrylic) diffuser

Pole adapter

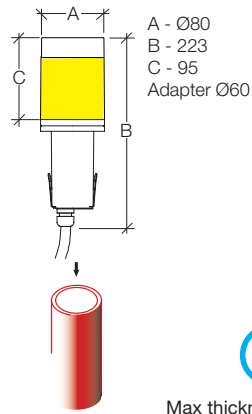- PC (polycarbonate) pole adapter in black granule







































Power	Black	Rust	Metallic grey RAL 9006	
max 10W - E27	1026.001N	1026.001J	1026.001M	1






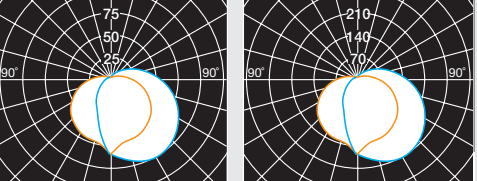



  Max lamp dimension allowed (Ø60 L110mm)
Lamp not included

new



		 Coled TP		 New Stelo TP		 New Stelo TP Opaed		 New Stelo TP Traled	
									
Ground installation		✓		✓		✓		✓	
Wall installation		--		✓		✓		✓	
Complying ECC standards		✓		✓		✓		✓	
Insulation class		⊕		□		□		□	
Voltage		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz	
Step MacAdam		3		--		3		3	
Life time		L70/B50>60Kh-Tc 105°C		--		L70/B50>60Kh-Tc 105°C		L70/B50>60Kh-Tc 105°C	
Colour temperature				--					
Luminaire output		15W 1518 lm	15W 1518 lm	--		5,1W 459 lm	5,1W 487 lm	5,1W 525 lm	5,1W 557 lm
Lamp holder		--		E27 - max 11W (lamp not included)		--		--	
IP (Protection degree)		IP65		IP65		IP65		IP65	
IK (Impact resistance)		IK05		IK02		IK02		IK06	
Year warranty		3		--		--		--	
Year warranty		--		✓		✓		✓	
Photobiological risk		✓		--		✓		✓	
Pre-wired with:		100cm cable H05RN-F 3x0,75mm ²		35cm cable H05RN-F 2x0,75mm ²		35cm cable H05RN-F 2x0,75mm ²		35cm cable H05RN-F 2x0,75mm ²	
CRI		≥80		--		≥80		≥80	
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included		 The "T"-3 ways IP68 connector cannot be placed inside the pole Ø60mm		 The "T"-3 ways IP68 connector cannot be placed inside the pole Ø60mm		 The "T"-3 ways IP68 connector cannot be placed inside the pole Ø60mm		 The "T"-3 ways IP68 connector cannot be placed inside the pole Ø60mm	

Technical details

 Easy Lux TP	 Antera	 Tao	
		 30W - E27 14,2W - Led	
✓	✓	✓	
✓	--	--	
✓	✓	✓	
☐	⊕	☐	
220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	
--	3	3	
--	L70/B50>60Kh-Tc 105°C		L70/B50>54Kh-Tc 85°C
--	● 3000K	● 4000K	● 3000K
--	15W 1007 lm	15W 1007 lm	14,2W 1644 lm
E27 - max 10W (lamp not included)	--		E27 - max 30W (lamp not included)
IP65	IP65		IP55
IK02	IK03		IK06
--	✓		✓
✓	--		--
--	✓		✓
35cm cable H05RN-F 2x0,75mm ²	70cm cable H05RN-F 3x0,75mm ²		--
--	≥80		≥80
 The "T"-3 ways IP68 connector cannot be placed inside the pole Ø60mm	 The "T"-3 ways IP68 connector cannot be placed inside the pole Ø60mm		 The "T"-3 ways IP68 connector cannot be placed inside the pole Ø60mm