



RECESSED LUMINAIRE



Lira 140 Round/Square

Technical details

- Silicone gaskets
- A2 stainless steel screws
- Adjustable $\pm 15^\circ$
- Factory sealed termination chamber utilising resin to guarantee sealing

Ring

- AISI 316L stainless steel round or square ring

Diffuser and beams

- Flat, transparent, tempered glass diffuser, 8mm thick
- Flood

Housing


- Anodised die-cast aluminium housing
- Metal PG9 cable gland

Compulsory accessories (to be ordered separately)

- Black reinforced thermoplastic recessed box $\varnothing 194 \times 152 \text{mm}$ closed above and below in order to facilitate concreting
- False ceiling locking mechanism kit


Optional accessories (to be ordered separately)

- IP68 connector
- "T"-3 ways IP68 connector

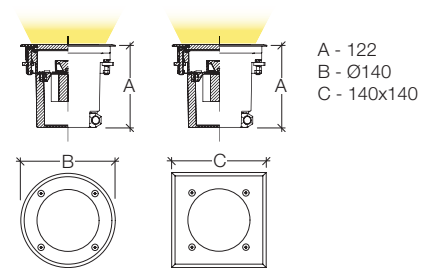


Circular recessed box

- A - $\varnothing 194$
- B - 152





Ceiling downlight for direct mounting, requiring $\varnothing 127 \text{mm}$ hole with locking mechanism




Beam Flood - Transparent diffuser

Power	Round	Square	
max 35W - GU10	4140.181W	4142.181W	1


 Max lamp dimension allowed ($\varnothing 50 \text{ L} 56 \text{mm}$)
 Lamp not included


Compulsory accessories	Code	
Circular recessed box $\varnothing 194 \times 152 \text{mm}$	7000.0005	1
False ceiling locking mechanism kit	4000.000W	1














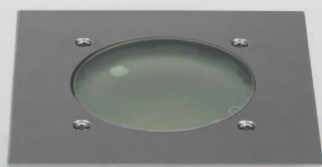






























Optional accessories	Code	
IP68 connector	CS093000	1
"T"-3 ways IP68 connector	CS093001	1





RECESSED LUMINAIRE



		 Lira 140 Round/Square	 Dracma 140	 Maia
				
Complying ECC standards				
Insulation class				
Voltage		220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Step MacAdam		--	--	3
Lamp holder		GU10 - max 35W (lamp not included)	GU10 - max 35W (lamp not included)	--
Life time		--	--	30Kh
Colour temperature		--	--	 3000K  4000K
Luminaire output		--	--	1,2W 52 lm  1,2W 55 lm
Beams/Optics		±15° Flood	±15° Flood	--
The installation requires a drainage system of 30cm (gravel)				--
IP (Protection degree)		IP67	IP67	IP65
IK (Impact resistance)		IK08	IK08	IK04
Year warranty		--	--	
Year warranty				--
Photobiological risk		--	--	
Pre-wired with:		30cm cable H05RN-F 3x1mm ²	30cm cable H05RN-F 3x1mm ²	--
Do not install in areas at risk of flooding				--
Max Load		2000Kg 20Km/h	2000Kg 20Km/h	--
CRI		--	--	≥80
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included		 <p>The "T"-3 ways and linear IP68 connector can be placed inside the recessed box</p>	 <p>The "T"-3 ways and linear IP68 connector can be placed inside the recessed box</p>	--

Technical details

RECESSED LUMINAIRE