



RECESSED LUMINAIRE



# Maia

## Technical details

- Wall recessed luminaire
- Silicone gaskets
- Polyester coating after a treatment specific for weathering resistance
- A2 stainless steel screws

## Recessed box


- Thermoplastic recessed box (included)

## Housing

- Non yellowing transparent PC (polycarbonate) housing IP65

## Front cover

- Painted PC (polycarbonate) front cover





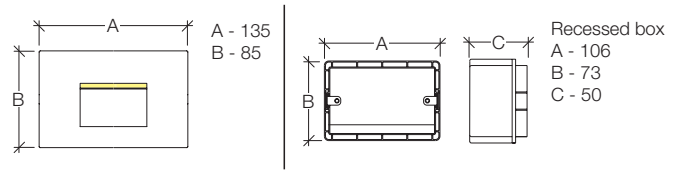









































| K/Power        | Metallic grey<br>RAL 9006 | Anthracite<br>RAL 7016<br>textured | White<br>RAL 9003 |   |
|----------------|---------------------------|------------------------------------|-------------------|---|
| ● 4000K - 1,2W | 1008.182M                 | 1008.182S                          | 1008.182B         | 1 |
| ● 3000K - 1,2W | 1008.184M                 | 1008.184S                          | 1008.184B         | 1 |



RECESSED LUMINAIRE

|   |   |   |
|---|---|---|
|  |  |  |
| Metallic grey<br>RAL 9006   | Anthracite<br>RAL 7016<br>textured  | White<br>RAL 9003   |

|   |   | <br>Lira 140<br>Round/Square   | <br>Dracma 140   | <br>Maia   |
|---|---|---|---|---|
|   |   |    |   |    |
| Complying ECC standards   |    |    |    |    |
| Insulation class  |    |    |    |    |
| Voltage   |    | 220-240V 50/60Hz  | 220-240V 50/60Hz  | 220-240V 50/60Hz  |
| Step MacAdam  |    | --  | --  | 3   |
| Lamp holder   |    | GU10 - max 35W<br>(lamp not included)   | GU10 - max 35W<br>(lamp not included)   | --  |
| Life time   |    | --  | --  | 30Kh  |
| Colour temperature  |   | --  | --  |  3000K  4000K |
| Luminaire output  |  | --  | --  | 1,2W 52 lm  1,2W 55 lm   |
| Beams/Optics  |  | ±15°<br>Flood   | ±15°<br>Flood   | --  |
| The installation requires a drainage system of 30cm (gravel)            |  |    |    | --  |
| IP (Protection degree)  |  | IP67  | IP67  | IP65  |
| IK (Impact resistance)  |  | IK08  | IK08  | IK04  |
| Year warranty   |  | --  | --  |    |
| Year warranty   |  |    |    | --  |
| Photobiological risk  |  | --  | --  |    |
| Pre-wired with:   |  | 30cm cable<br>H05RN-F 3x1mm <sup>2</sup>  | 30cm cable<br>H05RN-F 3x1mm <sup>2</sup>  | --  |
| Do not install in areas at risk of flooding                             |  |    |    | --  |
| Max Load  |  | 2000Kg<br>20Km/h  | 2000Kg<br>20Km/h  | --  |
| CRI   |  | --  | --  | ≥80   |
| Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included |  |  <p>The "T"-3 ways and linear IP68 connector can be placed inside the recessed box</p> |  <p>The "T"-3 ways and linear IP68 connector can be placed inside the recessed box</p> | --  |

# Technical details

RECESSED LUMINAIRE