

## Spike Combo

### Technical details


- Spike for direct ground fixing with cable and plug, complete with Ø150/200/250/300/400/500mm spherical diffuser
- A2 stainless steel screws
- 2x1mmq H05RN-F cable (2,5mt) with UNEL 2 pin plug

### Diffuser



- Non yellowing white PMMA (acrylic) diffuser

### Housing

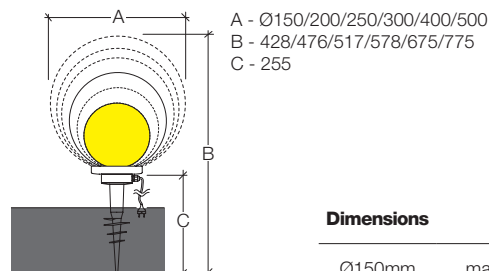- Reinforced thermoplastic housing
- Plastic PG9 cable gland



Dimensions	Power	Code	
Ø150mm	max 8W - E27	1459.001B	1
Ø200mm	max 11W - E27	1459.101B	1
Ø250mm	max 20W - E27	1459.201B	1
Ø300mm	max 21W - E27	1459.301B	1
Ø400mm	max 27W - E27	1459.501B	1
Ø500mm	max 33W - E27	1459.701B	1

- 

 Max lamp dimensions allowed  
 8W - (max Ø70 L110mm)  
 11W - (max Ø70 L130mm)  
 20W - (max Ø85 L170mm)  
 21W - (max Ø100 L190mm)  
 27W - (max Ø100 L190mm)  
 33W - (max Ø100 L210mm)  
**Lamp not included**

## Tower

### Technical details


- Luminaire for direct installation on boundary wall/floor complete with spherical diffuser Ø150/200/250mm
- A2 stainless steel screws

### Diffuser



- Non yellowing white PMMA (acrylic) diffuser

### Housing

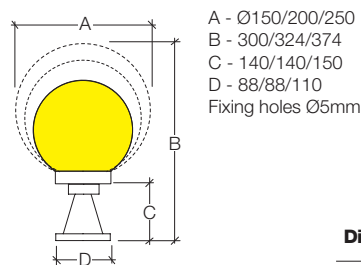- Reinforced thermoplastic housing







































Dimensions	Power	Code	
Ø150mm	max 8W - E27	1302.001B	1
Ø200mm	max 15W - E27	1302.101B	1
Ø250mm	max 21W - E27	1302.201B	1

- 

 Max lamp dimensions allowed  
 8W - (max Ø70 L110mm)  
 15W - (max Ø70 L160mm)  
 21W - (max Ø85 L180mm)  
**Lamp not included**



SFERE AND ACCESSORIES

			
<b>Bridge</b>	<b>Nadir</b>	<b>Spike Combo</b>	<b>Tower</b>
			

Complying ECC standards					
Insulation class					
Voltage		220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Lamp holder		E27 - max 8W-Ø150 E27 - max 15W-Ø200 E27 - max 21W-Ø250 (lamp not included)	E27 - max 8W-Ø150 E27 - max 11W-Ø200 (lamp not included)	E27 - max 8W-Ø150 E27 - max 11W-Ø200 E27 - max 20W-Ø250 E27 - max 21W-Ø300 E27 - max 27W-Ø400 E27 - max 33W-Ø500 (lamp not included)	E27 - max 8W-Ø150 E27 - max 15W-Ø200 E27 - max 21W-Ø250
IP (Protection degree)		IP44	IP44	IP44	IP43-ceiling IP40-wall
IK (Impact resistance)		IK08	IK08	IK08	IK08
Year warranty					
 Pulsar		--	--	--	--
 Quasar		--	--	--	--
 Giubar		--	--	--	--
 Sun		--	--	--	--
 Palù		--	--	--	--
 Vico		--	--	--	--
 Jolly		--	--	--	--
 Mistral and coloured Mistral		--	--	--	--
 Comet		--	--	--	--
 Spike		--	--	--	--

