

# Delux 360° + Delux Wall 360°

## Technical details

- Led's luminaire in two heights 470mm, 845mm, complete with base for plinth/floor installation (Delux 360°)
- Led's luminaires complete with fixing bracket for wall mounting (Delux wall 360°)
- Preset for installation on a Ø60mm pole (Delux 360°)
- Polyester powder coating after specific weathering resistance treatment
- Silicone gaskets
- Anodized aluminium heat sink
- PG9 metallic cable gland complete with osmotic valve for leakage of air and humidity
- N°24 LED's and PCB in IMS
- LED's circuit mains powered
- A2 stainless steel screws

## Top cover

- Anodised and painted die-cast aluminium top cover

## Diffuser

- Non yellowing transparent PMMA (acrylic) diffuser

## Housing


- Anodised and painted extruded aluminium housing

## Base (Delux 360°)

- Reinforced thermoplastic base for plinth/floor installation, or for installation on a Ø60mm pole


## Wall fixing bracket (Delux wall 360°)

- Wall fixing bracket 81x14x20mm in hot-dip galvanized steel 75µm UNI EN 1461

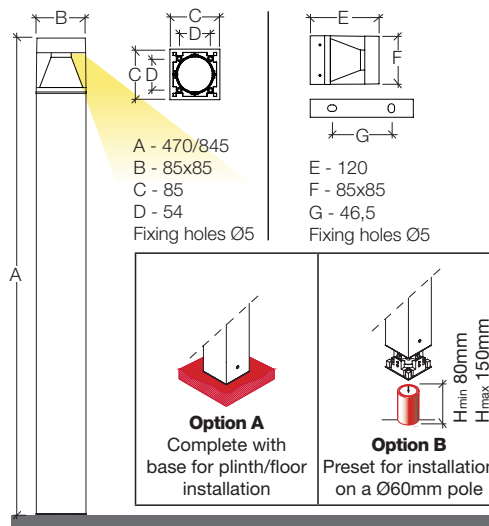

**I** = Pole spacing (m)  
**Emed** = Average illuminance (Lux)  
**Emin** = Minimum illuminance (Lux)

	I m	Emed Lux	Emin Lux
<b>10W</b>	4	20	5

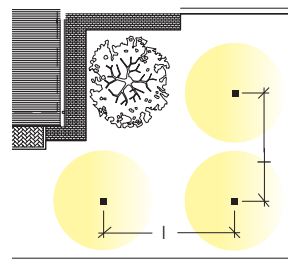


## Delux Wall 360°

Dimensions	K/Power	Rust	Metallic grey RAL 9006	Anthracite RAL 7016 textured	
85x85x120mm	● 4000K - 10W	0121.182J	0121.182M	0121.182S	1
	● 3000K - 10W	0121.184J	0121.184M	0121.184S	1

## Delux 360°


85x85x470mm	● 4000K - 10W	1021.082J	1021.082M	1021.082S	1
	● 3000K - 10W	1021.084J	1021.084M	1021.084S	1
85x85x845mm	● 4000K - 10W	1021.182J	1021.182M	1021.182S	1
	● 3000K - 10W	1021.184J	1021.184M	1021.184S	1

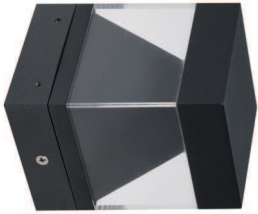


OUTDOOR RESIDENTIAL  
LUMINAIRE



		
		
Rust	Metallic grey RAL 9006	Anthracite RAL 7016 textured

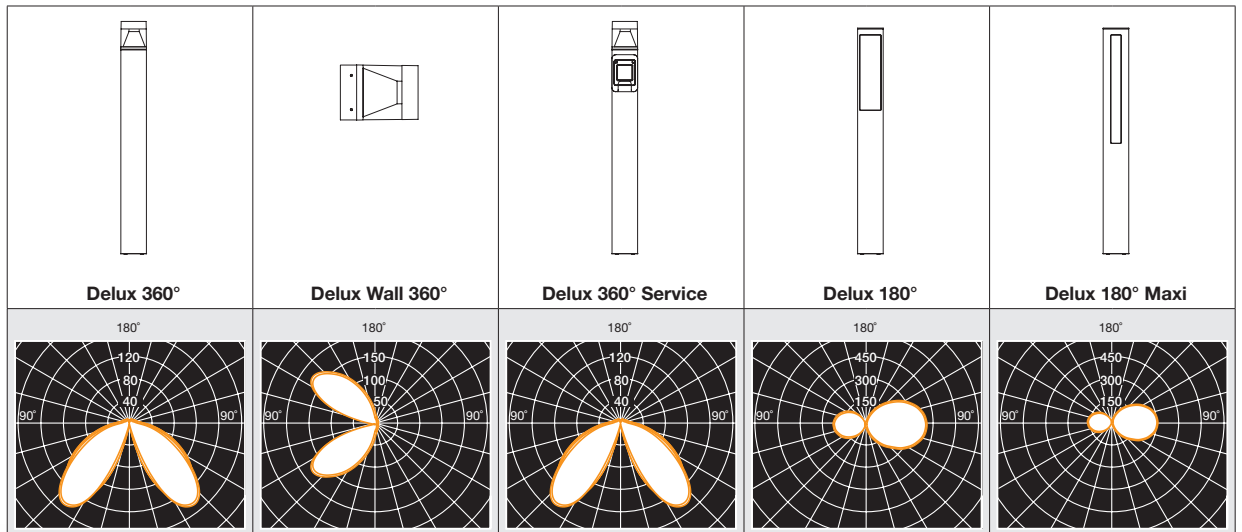

Wall installation		--		--	--	--	--	--	--	--	
Ground installation			--								
Complying ECC standards											
Insulation class											
Voltage		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz		220-240V 50/60Hz	
Step MacAdam		3		3		3		3		3	
Life time		L70/B50>54Kh-Tc 105°C		L70/B50>54Kh-Tc 105°C		L70/B50>60Kh-Tc 105°C		L70/B50>60Kh-Tc 105°C		L70/B50>60Kh-Tc 105°C	
Colour temperature		3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
Luminaire output		10W 663 lm	10W 663 lm	10W 663 lm	10W 663 lm	10W 663 lm	10W 663 lm	10W 869 lm	10W 869 lm	10W 710 lm	10W 710 lm
IP (Protection degree)		IP65		IP65		IP55		IP65		IP65	
IK (Impact resistance)		IK04		IK04		IK04		IK06		IK06	
Year warranty											
Photobiological risk											
Pre-wired with:		15cm cable H05RN-F 3x0,75mm <sup>2</sup>		90cm cable H05RN-F 3x0,75mm <sup>2</sup>		15cm cable H05RN-F 3x0,75mm <sup>2</sup>		25cm cable H05RN-F 2x0,75mm <sup>2</sup>		25cm cable H05RN-F 2x0,75mm <sup>2</sup>	
CRI		≥80		≥80		≥80		≥80		≥80	
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways) not included											
		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire	



							
Delux 90°		Delux Indi		Delux Service		Delux Round	
							
--		--		--		--	
✓		✓		✓		✓	
✓		✓		✓		✓	
				--			
220-240V 50/60Hz		220-240V 50/60Hz		--		220-240V 50/60Hz	
3		3		--		3	
L70/B50>60Kh - Tc 105°C		L90/B50>50Kh - Tc 105°C		--		L70/B50>54Kh - Tc 105°C	
 3000K	 4000K	 3000K	 4000K	--		 3000K	 4000K
15W 969 lm	15W 969 lm	8,4W 572 lm	8,4W 589 lm	--		10W 663 lm	10W 663 lm
IP65		IP65		IP55		IP65	
IK03		IK06		--		IK04	
✓		✓		✓		✓	
✓		✓		--		✓	
25cm cable H05RN-F 3x0,75mm <sup>2</sup>		25cm cable H05RN-F 2x0,75mm <sup>2</sup>		--		15cm cable H05RN-F 3x0,75mm <sup>2</sup>	
≥80		≥80		--		≥80	
							
The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire		The "T"-3 ways and linear IP68 connector can be placed inside the luminaire	

# Technical details

OUTDOOR RESIDENTIAL  
LUMINAIRE