

Lux Est 85 - Wall/Ceiling

Technical details

- Luminaire available in E27 versions complete with base for wall/ceiling installation
- Silicone gaskets
- Polyester powder coating after a treatment specific for weathering resistance
- A2 stainless steel screws

Diffuser


- Non yellowing translucent PMMA (acrylic) diffuser

Housing


- Extruded anodised aluminium housing in natural or painted finish (White/Anthracite/Rust)

Base for wall/ceiling installation

- Reinforced thermoplastic base for wall/ceiling installation

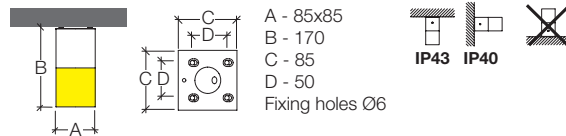

Power	White RAL 9003	Aluminium	Rust	Anthracite RAL 7016 textured	
max 12W - E27	0157.101B	0157.101G	0157.101J	0157.101S	1



Lux Est 85 - Wall

Technical details

- Luminaire available in E27 versions complete with base for wall installation
- Silicone gaskets
- Polyester powder coating after a treatment specific for weathering resistance
- A2 stainless steel screws

Diffuser


- Non yellowing translucent PMMA (acrylic) diffuser

Housing


- Extruded anodised aluminium housing in natural or painted finish (White/Anthracite/Rust)



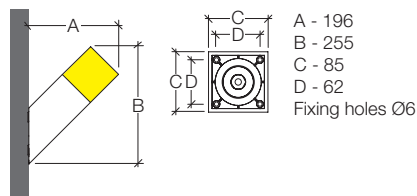

Base for wall installation

- Reinforced thermoplastic base for wall installation



Power	White RAL 9003	Aluminium	Rust	Anthracite RAL 7016 textured	
max 12W - E27	0158.101B	0158.101G	0158.101J	0158.101S	1

















			
White RAL 9003	Aluminium	Rust	Anthracite RAL 7016 textured






































OUTDOOR RESIDENTIAL
LUMINAIRE















			
White RAL 9003	Aluminium	Rust	Anthracite RAL 7016 textured

				
Lux Est 85 All-light	Lux Est 85 Semi-covered	Lux Est 85 Wall/Ceiling	Lux Est 85 Wall	Lux Est 170 All-light
				

Ground installation				--	--	
Ceiling installation		--	--		--	--
Wall installation		--	--			--
Complying ECC standards						
Insulation class	Class					
Voltage	V	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Lamp holder		E27 - max 21W (Lamp not included)	E27 - max 16W (Lamp not included)	E27 - max 12W (Lamp not included)	E27 - max 12W (Lamp not included)	E27 - max 27W (Lamp not included)
IP (Protection degree)		IP65	IP65	IP40/43	IP44	IP65
IK (Impact resistance)		IK06	IK06	IK06	IK06	IK06
Year warranty	5					
Outward cable with tinned connector included IP68		20cm cable H05RN-F 2x0,75mm ²	20cm cable H05RN-F 2x0,75mm ²	--	--	20cm cable H05RN-F 2x0,75mm ²
Connector IP68 CS093000 (linear) and CS093001 ("T"-3 ways)		 The "T"-3 ways and linear IP68 connector can be placed inside the luminaire	 The "T"-3 ways and linear IP68 connector can be placed inside the luminaire	 The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire	 The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire	 The "T"-3 ways and linear IP68 connector can be placed inside the luminaire

Technical details

 <p>Lux Est 170 Semi-covered</p>	 <p>Lux Est 170 Wall/Ceiling</p>	 <p>Lux Est 170 Wall</p>
		
✓	--	--
--	✓	--
--	✓	✓
✓	✓	✓
		
220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
E27 - max 25W (Lamp not included)	E27 - max 21W (Lamp not included)	E27 - max 27W (Lamp not included)
IP65	IP40/43	IP44
IK06	IK06	IK06
✓	✓	✓
20cm cable H05RN-F 2x0,75mm ²	--	--
 <p>The "T"-3 ways and linear IP68 connector can be placed inside the luminaire</p>	 <p>The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire</p>	 <p>The "T"-3 ways and linear IP68 connector cannot be placed inside the luminaire</p>